Quincy COMPRESSORS

PORTABLE UNITS

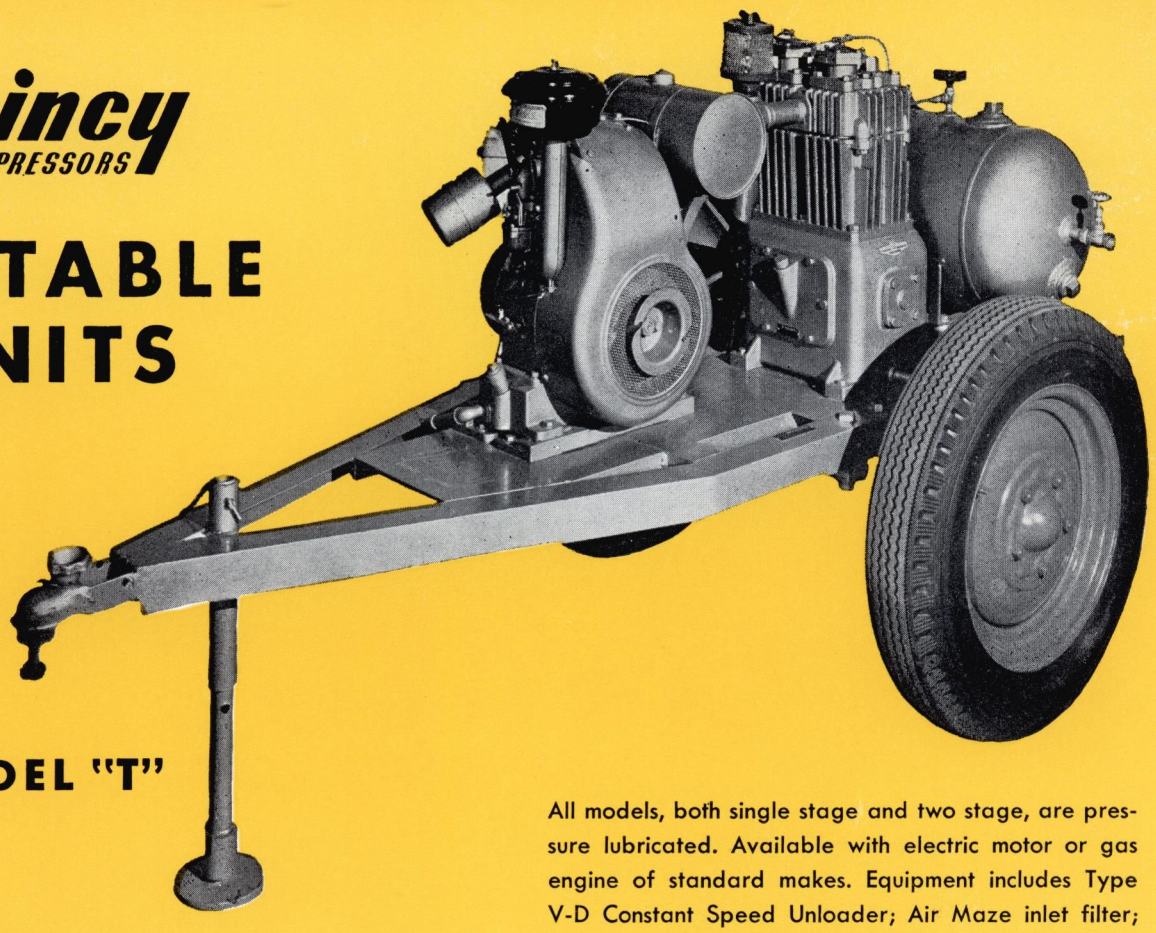

MODEL "T"

Provides compressed air for paint spraying, chipping, riveting, calking hammers, inflating all types of tires, drilling, cleaning machinery. Compressor is air-cooled. Features: automotive type pistons; drop forged crankshaft; totally enclosed crankcase—dust-proof; Timken main bearings.

All models, both single stage and two stage, are pressure lubricated. Available with electric motor or gas engine of standard makes. Equipment includes Type V-D Constant Speed Unloader; Air Maze inlet filter; 14″ x 24″ tank; pressure gauge; safety valve; drain cock; outlet valve. Trailer built of structural steel, spring mounted, on 5.50 x 16 tires. Gas engine driven units are available with electric starter, generator and battery. **Units also are available with skid mounting.**

SPECIFICATIONS
SINGLE STAGE

Model	Bore and Stroke	Motor or Engine H.P.	Cu. Ft. Displ.	Operating Pressure Lbs.	Comp. Speed	Dimensions			Approximate Shipping Weight
						Length	Width	Height	
T-216	3 x 2½*	3 4 Eng.	18.0 18.4	70-80 70-80	880 900	83⅞	42	42⅛	655 lbs. 675 lbs.
T-230	3½ x 3*	5 6 Eng.	30.0 30.0	70-80 70-80	900 900	83⅞	42	44½	720 lbs. 730 lbs.
T-240	4 x 3*	5 6 Eng.	37.0 39.5	70-80 70-80	840 900	83⅞	42	44½	720 lbs. 730 lbs.
T-244	4 x 3½*	7½ 10 Eng.	45.0 45.0	70-80 70-80	900 900	83⅞	42	48	1060 lbs. 1000 lbs.
T-255	4½ x 3½*	10 12 Eng.	56.0 58.0	70-80 70-80	870 900	83⅞	42	52	1060 lbs. 1000 lbs.

SPECIFICATIONS
TWO STAGE

Model	Bore and Stroke	Motor or Engine H.P.	Cu. Ft. Displ.	Operating Pressure Lbs.	Comp. Speed	Dimensions			Approximate Shipping Weight
						Length	Width	Height	
T-310	3½ & 2 x 2½	2 4 Eng.	9.5 10.0	160-175 160-175	690 730	83⅞	42	42⅛	655 lbs. 720 lbs.
T-325	4½ & 2½ x 3	5 6 Eng.	23.6 21.0	160-175 160-175	850 760	83⅞	42	44⅝	720 lbs. 740 lbs.
T-340	5¼ & 3 x 3½	7½ 10 Eng.	35.0 31.0	160-175 160-175	800 700	83⅞	42	49⅛	1130 lbs. 1080 lbs.
T-350	6 & 3¼ x 3½	10 12 Eng.	48.0 40.0	160-175 160-175	840 700	83⅞	42	52	1130 lbs. 1100 lbs.

*Duplex Cylinder

Form No. 700C

Printed in U.S.A.

Price List 705
Applying to Bulletin 700B
January 15, 1958

QUINCY COMPRESSOR CO.

QUINCY, ILLINOIS, U. S. A.

The QUINCY Portable Compressor Line

SINGLE STAGE

EQUIPPED WITH TYPE VD CONSTANT SPEED UNLOADER

Standard Pressure Setting 70-80 lbs.

Model	Cu. Ft. Displ.	Comp. Speed	Price Less Motor	Motor H. P.	Tank Size	Price 1 Ph., 60 Cy. 115-230 V.	Price 3 Ph., 60 Cy. 220-440 V.	Approx. Shipping Weight
T-216	17.4 18.4	870 900	$586.50	3 4 Eng.††	14x24 14 Gal.	$ 884.00 692.00	$ 736.00	655 675
T-230	30.0 30.0	900 900	655.00	5 6 Eng.†	14x24 14 Gal.	1025.50 793.50	821.00	720 730
T-240	37.0 39.5	840 900	675.00	5 6 Eng.†	14x24 14 Gal.	1045.50 813.50	841.00	730 740
T-244	45.0 45.0	900 900	832.50	7½ 12 Eng.**	14x24 14 Gal.	1079.50	1051.00	1060 1000
T-255	56.0 58.0	870 900	909.50	7½ 12 Eng.**	14x24 14 Gal.	1176.50	1127.00	1100 1040

TWO STAGE

EQUIPPED WITH TYPE VD CONSTANT SPEED UNLOADER

Standard Pressure Setting 160-175 lbs.

Model	Cu. Ft. Displ.	Comp. Speed	Price Less Motor	Motor H. P.	Tank Size	Price 1 Ph., 60 Cy. 115-230 V.	Price 3 Ph., 60 Cy. 220-440 V.	Approx. Shipping Weight
T-310	9.5 10.0	690 730	$611.00	2 4 Eng.††	14x24 14 Gal.	$ 824.00 712.00	$ 755.00	650 620
T-325	23.6 23.0	850 830	661.00	5 6 Eng.†	14x24 14 Gal.	1029.00 810.50	819.00	850 845
T-340	35.0 39.5	800 900	866.00	7½ 12 Eng.**	14x24 14 Gal.	1185.00	1156.00	1130 970
T-350	48.0 52.0	840 900	972.00	10 12 Eng.**	14x24 14 Gal.	1313.00	1265.00	1150 1035

††Wisconsin BKN.
†Wisconsin AENL or Briggs & Stratton 23A
**Wisconsin THD.

Extra for gasoline engine to be equipped with electric starter $70.00; electric starter and generator $101.00; electric starter, generator, and battery $121.00. This equipment available only on Models T-230, T-244, T-255, T-325, T-340, and T-350.

Trailer mounted on 5:50 x 16 tires.
For omission of tires and tubes, deduct, per unit $27.50.

For mounting on skids instead of trailer, deduct $66.00 from above prices.

ASME tanks furnished on all units unless National Board or Massachusetts stamping is specified.

PRINTED IN U.S.A.